

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 October 2003 (02.10.2003)

PCT

(10) International Publication Number
WO 03/080428 A1

(51) International Patent Classification⁷: **B63B 43/18**

(21) International Application Number: PCT/GB03/01192

(22) International Filing Date: 21 March 2003 (21.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0207056.3 26 March 2002 (26.03.2002) GB

(71) Applicant (for all designated States except US): **GIBBS TECHNOLOGIES LIMITED** [—/—]; La Motte Chambers, St Helier, Jersey, JE1 1BJ (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LOCKE, Adrian, John** [GB/GB]; 7 Alten Road, Waterlooville, Hampshire PO7 6DR (GB).

(74) Agents: **CHURCH, Simon, John** et al.; Lewis & Taylor, 144 New Walk, Leicester LE1 7JA (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MARINE CRAFT IMPACT PROTECTION

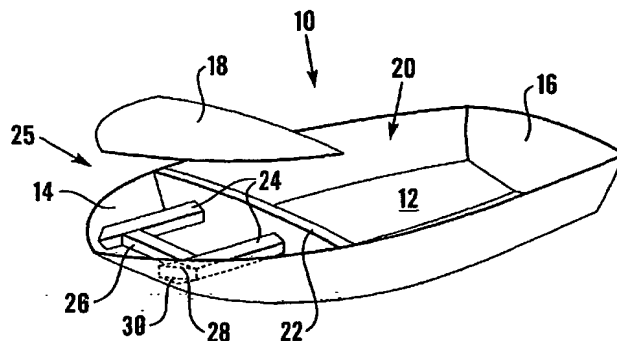

(57) Abstract: Marine craft (10) has a crushable frontal impact protection structure (25), comprising transverse bulkhead (22) protecting passenger area (20); longitudinal crushable tubes (24); and transverse member (26). Webs (28) and (30) strengthen tubes (24), which may be made of extruded, heat treated aluminium; stainless steel; or plastic. Tubes (24') in figs. 5 to 7 are splayed, to improve protection against angled impacts C. The forward ends of tubes (24) are tapered (27, fig. 3) to initiate deformation. Tubes (24, 26) and (24') may be hexagonal, round, or oval in cross-section. Fig. 8 shows longitudinal bulkheads (34, 36), and (38), and transverse bulkhead (44) in place of tubes (24, 26). Fig. 9 shows longitudinal corrugated sheets (48); these may be mounted transversely. Fig. 10 shows bow area (14) filled with deformable cellular foam, to act as a buoyancy aid if hull (12) is breached. Side and rear impact protection is also disclosed.



WO 03/080428 A1

MARINE CRAFT IMPACT PROTECTION

The present invention relates to marine craft having an impact protection arrangement. In particular, the present invention relates to marine craft capable of planing and which have an impact protection system.

- 5 By the term "marine craft capable of planing", is meant marine craft which can obtain hydrodynamic lift by virtue of their speed across a body of water, rather than their lift being provided primarily by buoyancy.

Up to now, marine craft which are capable of planing have not been provided with any means of absorbing crash energy from high speed frontal impacts in a predictable and controlled manner.

- 10 In order to plane, many marine leisure craft are capable of 30 knots (55 km/h) or more, hence impact closing speeds can be in excess of 60 knots (111 km/h). Such impacts may occur when the marine craft collides with another craft, with a jetty or with rocks, and can result in the sinking of the marine craft and serious injury to the helmsman and any passengers on board the craft. People on board marine craft often stand up, and those seated are generally not restrained with safety
- 15 belts. Consequently, sudden deceleration of a marine craft due to a collision can cause people to be thrown over board.

- Whilst frontal collisions are perhaps of most concern, collisions to the rear or a side of a marine craft may also result in injuries to occupants and severe damage to the craft, even though the impact speeds are generally lower. In respect of side impacts in particular, considerable deformation of
- 20 the hull may be incurred through the intrusion of a bow of another craft. When hulls of small marine craft were made exclusively of wood, intrusion of the bow of another craft, even perpendicular to the gunwale, could result in considerable elastic deformation, but the wood would quickly spring back to its original shape without lasting damage. For all their maintenance advantages, more modern marine craft building materials, such as plastics or fibre reinforced plastics, are more liable

to crack under impact. Thus even a relatively low speed impact to the side of a marine craft could result in the hull cracking and ultimately lead to the craft sinking.

It is known from US 3,598,077, to provide a marine craft with an inflatable bow structure fitted externally of the main rigid bow and which is intended for cushioning the hull structure against wave impacts. An inflatable structure of this type would not be suitable for protecting the occupants of a marine craft from deceleration due to collisions; not least because of the strong likelihood of a sudden peak in deceleration as the inflatable structure burst on contact with another vessel or with a fixed obstruction. The structure requires large quantities of air to be supplied under pressure to maintain it in the inflated state. It is, therefore, principally intended for use in a craft having a hovercraft type inflatable outer skirt providing lift by virtue of air pressure supplied by fans, where the fans can also inflate the bow structure. Application of an inflatable bow structure to a conventional rigid hull craft capable of planing would require the use of fans specifically to inflate the bow. This would add significantly to the weight of the craft and would be a drain on the available power. Furthermore, the inflatable structure would increase the overall dimensions of the craft without improving its functionality in terms of additional storage space or vessel components.

It is an object of the invention to provide a marine craft capable of planing in which the risk of sinking the craft as a result of a collision is reduced.

It is a further object of the invention to provide a marine craft capable of planing in which the deceleration forces on the craft and its occupants during a collision will be lessened, thus reducing the risk of an occupant being injured or thrown over board.

According to the broadest aspect of the invention, there is provided a marine craft capable of planing, the marine craft comprising a hull and a passenger area generally within the hull, characterised in that a means for absorbing impact energy is provided between the hull and the passenger area.

Preferably, the passenger area is spaced inwardly from at least a portion of the hull and the means for absorbing impact energy is located between the passenger area and the portion of the hull.

5 Preferably, the means for absorbing impact energy is a deformable structure. More preferably, the deformable structure is mounted between the hull and a structural component of the craft, which may be positioned adjacent a peripheral region of the passenger area. Advantageously, the structural component may be a bulkhead which separates the passenger area from at least a portion of the hull. In such an arrangement, it is particularly advantageous if the bulkhead is adapted to prevent, or at least to resist, movement of water into the passenger area from the hull portion.

10 In a preferred embodiment, the deformable structure comprises at least one deformable tube which extends between the hull and the structural component, a first end of the or each tube being associated with the hull, and a second end of the or each tube being associated with the structural component.

15 Preferably, the deformable structure comprises two or more deformable tubes extending between the hull and the structural component, the arrangement being such that at least two of the tubes extend at an angle relative to one another such that their first ends are further apart than their second ends. The at least two tubes may extend at an angle of up to and including 30 degrees to each other and in particular, the at least two tubes may extend at an angle of up to and including 20 degrees to each other.

20 Preferably, the first end of the or each tube is tapered, such that the cross sectional area of the tubes reduces towards the hull.

Where the deformable structure comprises two or more deformable tubes extending between the hull and the structural component, the structure may further comprise bracing means to resist lateral movement of the tubes towards one another during an impact.

The or each tube may be manufactured from a metal material such as steel, stainless steel, aluminium or aluminium alloy. The material may be extruded and may be heat treated. Alternatively, the or each tube may be manufactured from a plastics, or a reinforced plastics, or a composite material.

- 5 Preferably, the or each tube has at least one internal web extending over at least part of its length.

In an alternative preferred embodiment, the deformable structure comprises at least one deformable plate which extends between the hull and the structural component. Preferably, the deformable structure comprises a plurality of spaced apart, deformable plates, each of which extend between the hull and the structural component. The or each plate may be aligned generally vertically of the craft or generally horizontally of the craft.

The or each plate may be substantially planar or corrugated. Where the deformable structure comprises two or more corrugated plates, the plates may be arranged such that the troughs and peaks of adjacent plates meet.

Where the deformable structure comprises two or more plates extending between the hull and the structural component, bracing means may be provided to resist movement of the plates towards each other during impact. Preferably, the bracing means comprises a further plate extending between adjacent plates.

The or each plate may be made of a metal, or a plastics, or a reinforced plastics, or a composite material.

20 In a further alternative embodiment, the deformable structure comprises a cellular material, such as expanded polystyrene or polyurethane foam. The cellular material is preferably bonded to the hull and the structural component.

Preferably, the hull defines a bow portion and the, or a, means for absorbing impact energy is located between the bow portion and the passenger area.

Preferably, the hull defines a stern portion and the, or a, means for absorbing impact energy is located between the stern portion and the passenger area.

- 5 Preferably, the hull defines a side portion, and the, or a, means for absorbing impact energy is located between the side portion and the passenger area.

Preferably, the hull defines a bow portion and a transverse bulkhead is provided which separates the passenger area from the bow portion, the, or a, deformable structure being mounted between the bow portion and the transverse bulkhead.

- 10 Preferably, the means for absorbing impact energy is adapted to absorb all or some of the impact energy in a predictable and controlled manner.

The invention will now be described, by way of example only, with reference to the accompanying drawings in which:

15 Figure 1 is a diagrammatic, perspective view of a first embodiment of a marine craft in accordance with the invention, in which a deformable structure is mounted in the front of the craft, some hidden detail being omitted for clarity;

Figure 2 is a diagrammatic, plan view of a front portion of the marine craft of Fig 1;

Figure 3 is a diagrammatic, side view of a front portion of the marine craft of Figs 1 and 2;

20 Figure 4 is a sectional view through a tube forming part of the deformable structure of the marine craft of Figs 1 to 3;

- Figure 5 is a view similar to that of Figure 2, showing a modification to the deformable structure of the first embodiment;
- Figure 6 is a diagrammatic a side view of the modified deformable structure of Fig. 5;
- Figure 7 is an enlarged cross sectional view of a tube forming part of the modified deformable structure, taken on line B-B of Figure 6;
- Figure 8 is a view similar to that of Fig. 1, showing a second embodiment of a marine craft in accordance with the invention, having an alternative form of deformable structure;
- Figure 9 is a view similar to that of Fig. 1, showing a third embodiment of a marine craft in accordance with the invention having a yet further alternative form of deformable structure; and
- Figure 10 is a view similar to that of Fig. 1, showing a fourth embodiment of a marine craft in accordance with the invention having a still further alternative form of deformable structure.
- Referring firstly to Figs 1 to 4, a first embodiment of a marine craft in accordance with the present invention is generally indicated at 10. The craft has a hull 12 which defines a bow portion 14 and a stern portion 16. The craft also has a bow top 18 (shown detached from the marine craft) for enclosing the bow portion. A passenger area of the craft 10 is indicated generally at 20. The passenger area 20 is located within the hull and is separated from the bows 14 by a structural bulkhead 22, which is positioned transversely in the craft 10 between the sides of the hull 12. Preferably, a water tight seal is formed between the edges of the bulkhead and the hull 12 and the bow top 18 (when fitted), to prevent, or at least to resist, water from entering the passenger area 20 from the bows should the bows become flooded, for example, in the event of the bows rupturing

during a collision of the craft.

A deformable or crushable structure, indicated at 25, for absorbing impact energy is located between the bow portion 14 of the hull and the passenger area 20. The deformable structure 25 comprises a pair of collapsible tubes 24, a first end of the tubes being connected to the bows 14, and a second end of the tubes being connected to the transverse bulkhead 22. A structural cross member or brace 26 is connected transversely between the tubes 24. The brace 26 provides stability to the structure 25 and prevents the tubes 24 from simply being bent or deflected towards each other in the case of a frontal impact which is offset from the centre line of the craft.

The tubes 24 are manufactured from extruded aluminium and are designed to progressively deform, whilst absorbing energy, in a predictable and controlled manner during a frontal impact of the craft. The extruded aluminium tubes may be heat treated, for example by tempering, to improve their mechanical properties and to reduce the risk of the tubes tearing or splitting during an impact.

Extruded aluminium or aluminium alloy is the preferred material for the tubes because the high level of control which is possible in manufacture means that the tubes can have a very repeatable and predictable energy absorption performance. Also aluminium has good corrosion resistance in salt water environments. Nevertheless, the tubes 24 can be made from any suitable material such as steel, stainless steel, other metals, composite materials, or plastics, including fibre reinforced plastics.

As can be seen from Figure 4, the tubes 24 have a hexagonal cross section, with two webs 28, 30 respectively joining the first and third, and fourth and sixth internal vertices of the hexagon. The webs 28, 30 extend along the length of the tubes and increase the amount of energy which can be absorbed for a given length of tube. The webs also act to stabilize the section against bending.

Although the tubes 24 have been described as being hexagonal in cross section, tubes of any suitable cross section can be used. For example the tubes 24 may be circular or oval in cross

section. Furthermore, the structural cross member or brace 26 may have the same cross section as the tubes 24 or it may have a different cross section.

As indicated at 27 in Figure 3, the top and bottom of each of the tubes 24 are tapered inwardly towards the hull from close to the point at which the tubes are connected to the cross member 26.

5 The ends of the tubes closest to the hull thus have a reduced cross sectional area, which means that deformation of these ends can be initiated at a reduced load compared with the rest of the tubes. This helps to ensure that the tubes start collapsing from the outer ends, thus absorbing impact energy in a controlled manner over the maximum length of the tubes 24.

10 During an impact, the tubes 24 will progressively buckle and deform along their length absorbing some or all of the impact energy in a predictable and controlled manner. This reduces the deceleration levels experienced by the occupants and minimises deformation in the passenger area. It will be apparent that the structural bulkhead 22 must be designed with sufficient strength to resist the axial loading required to initiate buckling of the tubes 24.

15 Figures 5 to 7, show a modified deformable structure 25' in which the tubes 24' connected between the transverse bulkhead 22 and the bows 14 are splayed outwardly from the longitudinal centre line 125 of the craft by an angle α and the structural member 26' connects the forward end of each tube 24'.

20 By angling the tubes 24' outwardly as shown, the deformable structure is better able to cope with impacts which occur at an angle to the bows such as that indicated by the arrow C. In the arrangement shown in Figures 1 to 4, where the tubes 24 extend parallel to the longitudinal centre line of the craft and to each other, there is a risk that an angled impact may cause the whole structure 25 to be deflected sideways rather than to crumple. This risk is reduced or eliminated by angling the tubes 24' outwardly.

It has been found that an angle α of up to fifteen degrees, and in particular an angle α of up to ten

degrees, is effective in causing the tubes 24' to crush longitudinally where a collision C occurs at an angle of up to thirty degrees from the centre line 125, whilst still being effective in a head-on collision. Considered another way, the tubes 24' are arranged such that they are angled outwardly relative to one another by an angle of up to thirty degrees, and in particular by an angle of twenty
5 degrees.

In the modified structure 25', the tubes 24' have a circular cross section, as is shown in Figure 7, with parallel spaced webs 28', 30' extending along the length of the tubes, again to increase the amount of energy which can be absorbed for a given length of tube. As is indicated at 27', the outer ends of the tubes are tapered inwardly towards the hull.

10 Although the tubes 24' have been described as being circular in cross section, this is not essential and the tubes 24' can be of any suitable cross section. For example the tubes 24' could be oval in cross section with curved or flat sides or the tubes could be polygonal in cross section as with the tubes 24 in Figures 1 to 4. In the modified structure 25', the structural cross member or brace 26' is of rectangular cross section as can be seen from Figure 6.

15 Whereas in the embodiments described above, the deformable structures 25, 25' comprises two tubes extending between the hull and the bulkhead, this is not essential and more or less than two tubes can be used as required.

Further embodiments of the invention will now be described with reference to Figures 8 to 10. The same reference numerals have been used to designate parts of the marine craft which are common
20 to all of the embodiments, including the hull 12, the bows 14, the stern 16, the structural transverse bulkhead 22 and the passenger area 20.

A further embodiment of a marine craft in accordance with the invention is indicated at 31 in Figure 8, and comprises a deformable structure 32, mounted between the transverse bulkhead 22 and the bows 14. The deformable structure 32 includes three generally vertically aligned, deformable plates

34,36,38 which are spaced apart and extend between the hull and the transverse bulkhead. The plates 34, 36, 38 are aligned generally parallel to each other and to the longitudinal axis of the craft. The central plate 36 is in alignment with the central axis of the craft 31 and extends from the transverse bulkhead 22 to the tip of the bows 40. The other plates 34,38 are positioned on either side of the central plate 36. A brace 44, in the form of a transverse plate, connects the ends of the outer deformable plates 34,38 to the central deformable plate 36 and resists movement of the deformable plates towards each other during an impact which is offset from the centre line of the craft. The deformable plates 34, 36, 38 are designed to crumple or buckle in the event of a frontal impact, so as to absorb some or all of the impact energy in a controlled and predictable manner. Although the deformable structure 32 is shown as having three deformable plates, this is not essential and more or less than three plates can be used as required.

Indicated at 45 in Figure 9, is a yet further embodiment of a marine craft in accordance with the invention which includes a deformable structure 46. In this figure the bows 14 of the craft 45 have been omitted, in order to show the deformable structure 46 more clearly.

The deformable structure 46 comprises three deformable, corrugated plates 48 which are arranged generally horizontally of the craft and which extend between the transverse bulkhead 22 and the bow portion 14 of the hull 12. In the embodiment as shown, the corrugations are aligned parallel with the longitudinal axis of the craft 45. In an alternative arrangement (not shown), the corrugations are aligned perpendicular to the longitudinal axis of the craft 45.

In the present embodiment, three corrugated plates 48 are positioned one above the other, and adjacent plates 48 are connected together where peaks 50 and troughs 52 in the corrugations of the respective plates 48 meet. The plates 48 can be made of any suitable material such as metal, plastics, reinforced plastics or composite materials and are designed to crumple or buckle in the event of a frontal impact, so as to absorb the impact energy in a controlled and predictable manner.

Although the present embodiment uses three corrugated plates, this is not essential and more or less than three plates can be used as required.

In a final embodiment, shown in Fig 10, a deformable structure 54 is provided by filling the area between the transverse bulkhead 22 and the bows portion 14 of the hull 12 with a deformable cellular material 52, for example expanded polystyrene or polyurethane foam. The cellular material 52 is bonded to the bulkhead 22 and the inside of the bows 14 and acts as a buoyancy aid, as well as a deformable structure 54 for absorbing impact energy in a collision. A bow top 18 is also shown detached from the marine craft 51 as in Fig 1.

In all of the embodiments shown, the deformable structures 25, 25', 32, 46 or 54 are designed to buckle or deform in a typical head-on or near head-on impact collision. In buckling or deforming, the deformable structures 25, 25', 32, 46 or 54 absorb impact energy in a controlled and predictable manner, so as to reduce to some extent the rate of deceleration of the craft. In the event of a collision, the structural transverse bulkhead 22, which extends between the sides of the water craft hull 12, transmits deceleration forces to the craft, and maintains the integrity of the passenger area 20, thus reducing the risk of the craft sinking. Whilst the deformable structures have been shown as being mounted between the hull and a structural bulkhead, this arrangement is not essential to the invention. For example, the deformable structures could be mounted between the hull and any suitable structural component of the craft which is capable of resisting the load required to initiate deformation of the deformable structure and of transmitting the deceleration forces to the craft. The structural component could, for example, be a frame member of the craft positioned adjacent a peripheral region of the passenger area. In such an arrangement, a watertight bulkhead may also be provided to seal the passenger area from the hull in the region of the deformable structure. Furthermore, the structural component need not be a single integral component but could comprise of a number of discrete structural elements. For example, in the deformable structures 25, 25', each of the tubes could be mounted to a separate frame member.

Although the embodiments described above are shown in the front of the craft and are arranged to reduce the effects of frontal collisions, any of those embodiments may be readily adapted to be built into the stern of the craft.

- In addition, deformable structures similar to those described above can be provided between the passenger area and a side portion of the hull. For example, deformable tubes 24 or 24', deformable plates 34, 36, 38, or 48, or deformable cellular material 52 could be positioned between a side region of the hull 12 and the passenger area to reinforce the sides of the hull. As discussed above,
- 5 modern marine craft building materials are more prone to cracking under impact than traditional wood materials. It is therefore desirable to limit hull deformation, not only to limit deceleration forces on passengers, but also to maintain the buoyancy of the vessel. Plastic reinforcing tubes, corrugated plates or foam all offer good deformation characteristics and are particularly suited for use in this area.
- 10 It should be noted that the term "marine craft" is intended to include amphibious craft within its scope, even though the marine craft shown in the Figures are all depicted as small boats of conventional shape.

CLAIMS

1. A marine craft capable of planing, the marine craft comprising a hull and a passenger area generally within the hull, characterised in that a means for absorbing impact energy is provided between the hull and the passenger area.
- 5 2. A marine craft as claimed in claim 1, in which the passenger area is spaced inwardly from at least a portion of the hull and the means for absorbing impact energy is located between the passenger area and the portion of the hull.
3. A marine craft as claimed in claim 1 or claim 2, in which the means for absorbing impact energy is a deformable structure.
- 10 4. A marine craft as claimed in claim 3, in which the deformable structure is mounted between the hull and a structural component of the craft.
5. A marine craft as claimed in claim 4, in which the structural component is positioned adjacent a peripheral region of the passenger area.
6. A marine craft as claimed in claim 4 or claim 5, in which the structural component is a
15 bulkhead which separates the passenger area from at least a portion of the hull.
7. A marine craft as claimed in claim 6, in which the bulkhead is adapted to prevent, or at least to resist, movement of water into the passenger area from the hull portion.
8. A marine craft as claimed in any one of claims 4 to 7, in which the deformable structure
20 comprises at least one deformable tube which extends between the hull and the structural component, a first end of the or each tube being associated with the hull, and a second end of the or each tube being associated with the structural component.

9. A marine craft as claimed in claim 8, in which the deformable structure comprises two or more deformable tubes extending between the hull and the structural component, the arrangement being such that at least two of the tubes extend at an angle relative to one another such that their first ends are further apart than their second ends.
- 5 10. A marine craft as claimed in claim 9, in which the at least two tubes extend at an angle of up to and including 30 degrees to each other.
11. A marine craft as claimed in claim 9 or claim 10, in which the at least two tubes extend at an angle of up to and including 20 degrees to each other.
- 10 12. A marine craft as claimed in any one of claims 8 to 11, in which the first end of the or each tube is tapered, such that the cross sectional area of the or each tube reduces towards the hull.
13. A marine craft as claimed in any one of claims 8 to 12, in which the deformable structure comprises two or more deformable tubes extending between the hull and the structural component, the structure further comprising bracing means to resist lateral movement of
15 the tubes towards one another during an impact.
14. A marine craft as claimed in any one of claims 8 to 13, in which the or each tube is manufactured from a metal such as steel, stainless steel, aluminium, or aluminium alloy.
15. A marine craft as claimed in claim 14, in which the or each tube is manufactured from a
20 metal which is extruded.
16. A marine craft as claimed in claim 14 or claim 15, in which the or each tube is heat treated.
17. A marine craft as claimed in any one of claims 8 to 13, in which the or each tube is

manufactured from a plastics, or a reinforced plastics, or a composite material.

18. A marine craft as claimed in any one of claims 8 to 17, in which the or each tube has at least one internal web extending over at least part of its length.
19. A marine craft as claimed in any one of claims 4 to 7, in which the deformable structure comprises at least one deformable plate which extends between the hull and the structural component.
20. A marine craft as claimed in claim 19, in which the deformable structure comprises a plurality of spaced apart, deformable plates, each of which extend between the hull and the structural component.
21. A marine craft as claimed in claim 19 or claim 20, in which the or each plate is aligned generally vertically of the craft.
22. A marine craft as claimed in claim 19 or claim 20, in which the or each plate is aligned generally horizontally of the craft.
23. A marine craft as claimed in any one of claims 19 to 22, in which the or each plate is substantially planar.
24. A marine craft as claimed in any one of claims 19 to 22, in which the or each plate is corrugated.
25. A marine craft as claimed in claim 24, in which the deformable structure comprises two or more corrugated plates arranged such that the troughs and peaks of adjacent plates meet.
26. A marine craft as claimed in claim 20, or any one of claims 21 to 25 when dependent on

claim 20, in which bracing means is provided to resist movement of the plates towards each other during impact.

27. A marine craft as claimed in claim 26, in which the bracing means comprises a further plate extending between adjacent plates.
- 5 28. A marine craft as claimed in any one of claims 19 to 27, in which the or each plate is made of a metal, or a plastics, or a reinforced plastics, or a composite material.
29. A marine craft as claimed in any one of claims 3 to 7, in which the deformable structure comprises a cellular material, such as expanded polystyrene or polyurethane foam.
- 10 30. A marine craft as claimed in claim 29, when dependent on claim 4, in which the cellular material is bonded to the hull and to the structural component.
31. A marine craft as claimed in any previous claim, in which the hull defines a bow portion and the, or a, means for absorbing impact energy is located between the bow portion and the passenger area.
- 15 32. A marine craft as claimed in any previous claim, in which the hull defines a stern portion and the, or a, means for absorbing impact energy is located between the stern portion and the passenger area.
33. A marine craft as claimed in any previous claim, in which the hull defines a side portion, and the, or a, means for absorbing impact energy is located between the side portion and the passenger area.
- 20 34. A marine craft as claimed in any one of claims 3 to 33, in which the hull defines a bow portion and a transverse bulkhead is provided which separates the passenger area from the

bow portion, the, or a, deformable structure being mounted between the bow portion and the transverse bulkhead.

35. A marine craft as claimed in any previous claim, in which the means for absorbing impact energy is adapted to absorb all or some of the impact energy in a predictable and controlled manner.
36. A marine craft substantially as hereinbefore described with reference to and as illustrated in Figures 1 to 4, or Figures 5 to 7, or Figure 8, or Figure 9, or Figure 10 of the accompanying drawings.

1/3

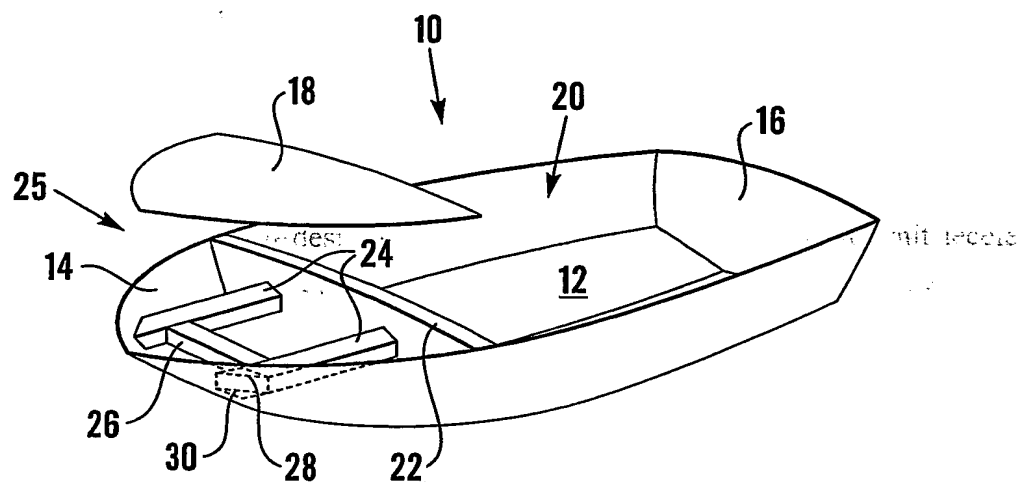


Fig. 1

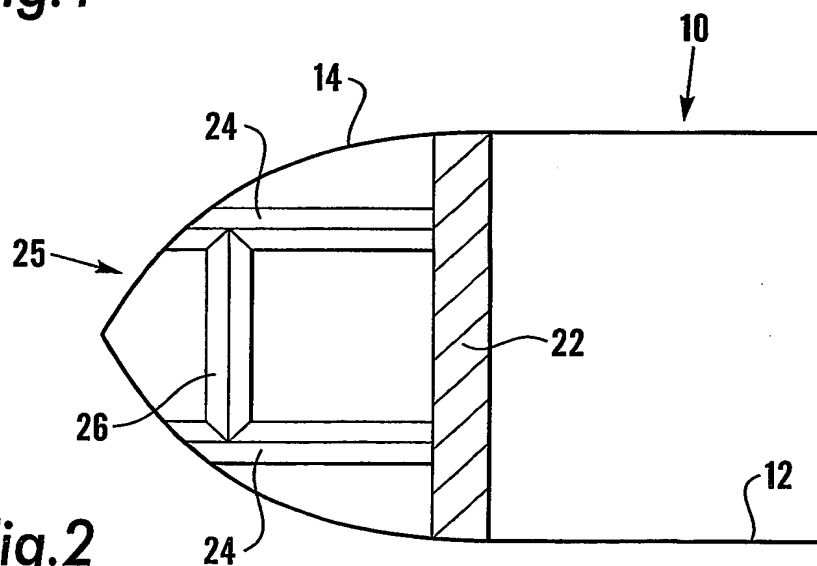


Fig.2

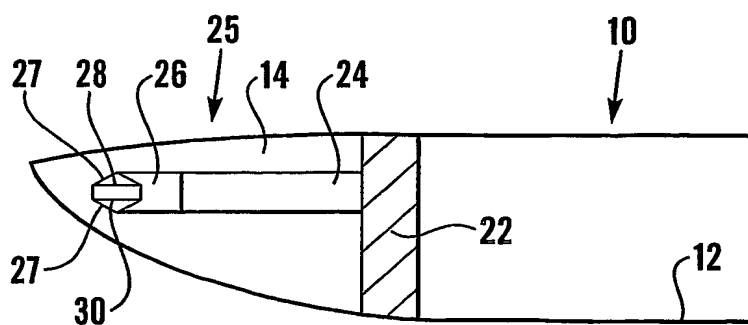


Fig.3







Fig.4

2/3

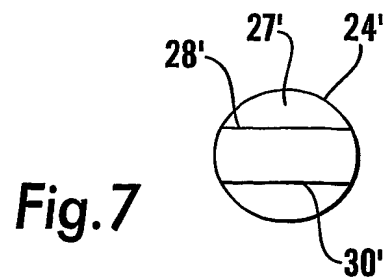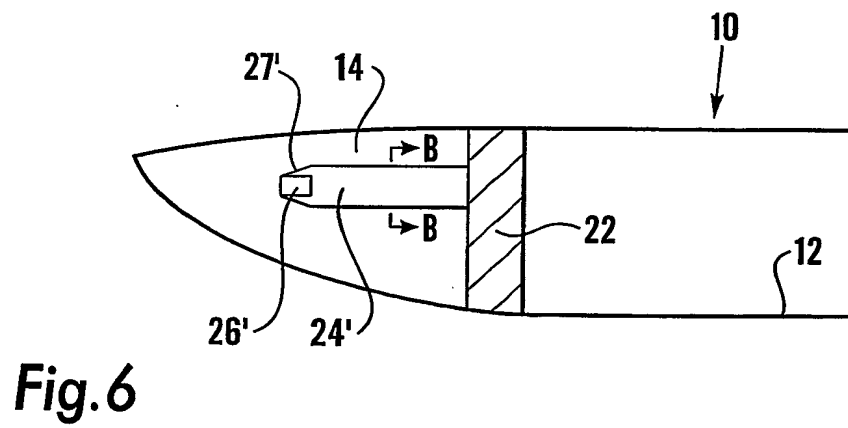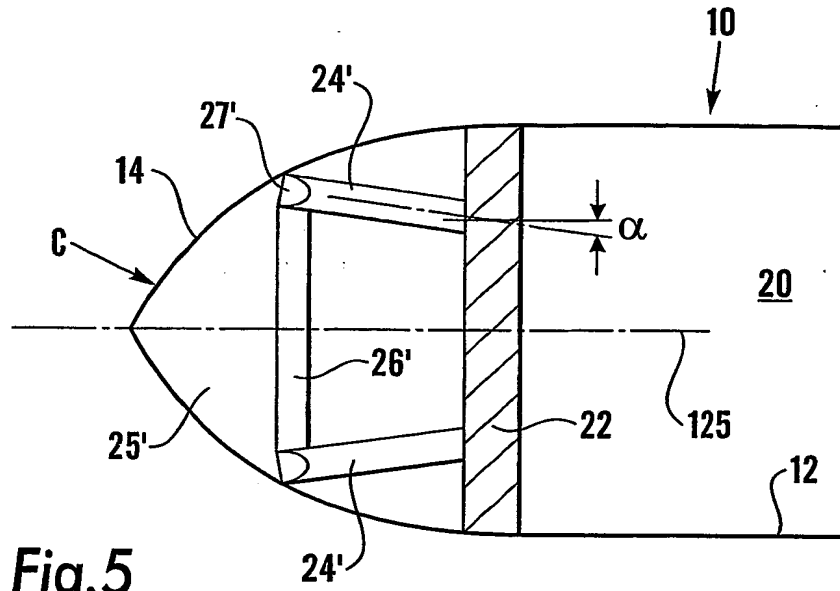

3/3

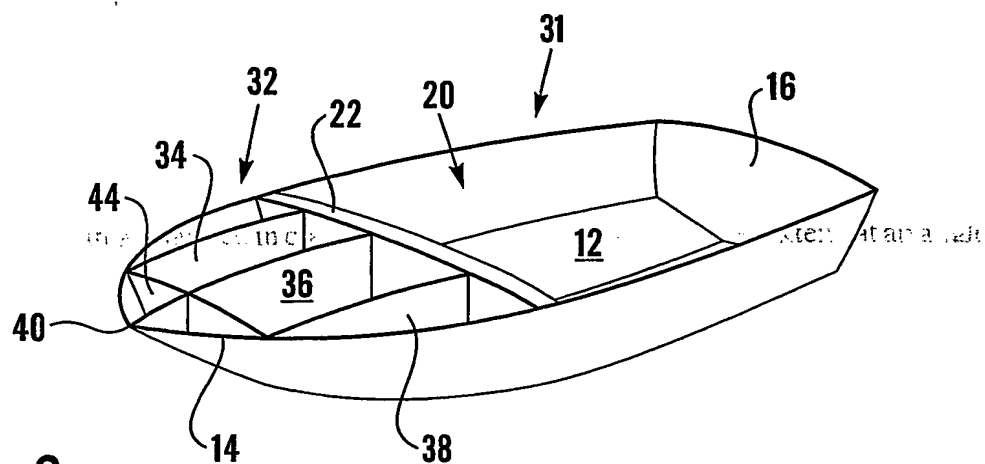


Fig.8

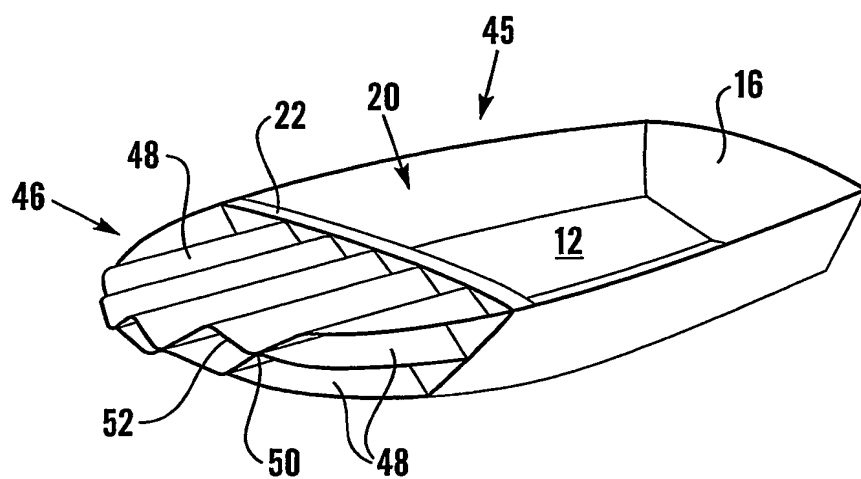


Fig.9

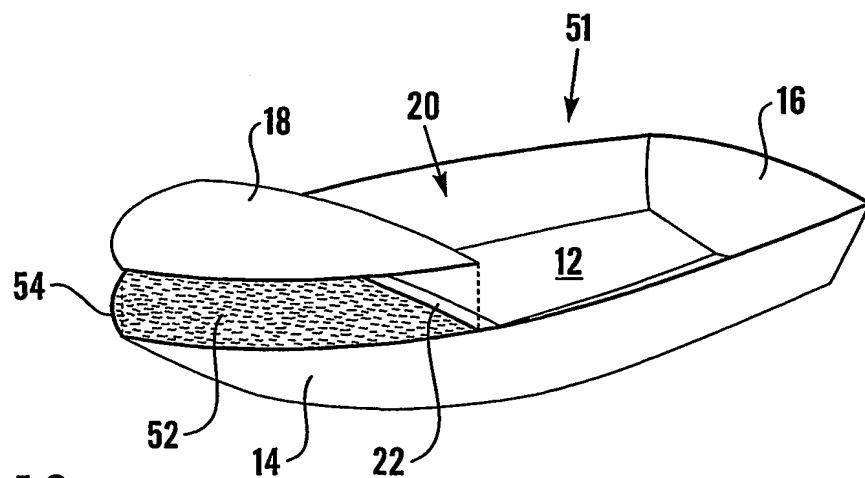


Fig. 10

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01192

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B63B43/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 776 637 A (CHADWICK WILLIAM R) 8 January 1957 (1957-01-08) the whole document	1-5
X	US 549 319 A (KATZIN) 5 November 1895 (1895-11-05) the whole document	1-6
X	US 1 130 809 A (GERBER) 9 March 1915 (1915-03-09) the whole document	1-9
A	US 3 171 378 A (WOLFGANG LEHMANN GUENTHER) 2 March 1965 (1965-03-02)	
A	US 991 224 A (MORAUSZKY) 2 May 1911 (1911-05-02)	
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

1 July 2003

Date of mailing of the international search report

09/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Schepper, H

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01192

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 543 654 A (BAGGERUD OSCAR J) 27 February 1951 (1951-02-27) ---	
A	US 1 535 155 A (HAY WILLIAM I) 28 April 1925 (1925-04-28) ---	
A	WO 00 35746 A (LUDOLPHIJ JOHANNES WILHELMUS L ; SCHELDE MARITIEM B V (NL)) 22 June 2000 (2000-06-22) the whole document ---	9-35 not relevant
A	US 5 542 365 A (ACHTARIDES THEODORE A ET AL) 6 August 1996 (1996-08-06) the whole document ---	9-35
A	EP 0 799 764 A (SCHELDE MARITIEM B V) 8 October 1997 (1997-10-08) the whole document -----	9-35

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01192

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2776637	A	08-01-1957	NONE
US 549319	A		NONE
US 1130809	A		NONE
US 3171378	A	02-03-1965	NONE
US 991224	A		NONE
US 2543654	A	27-02-1951	NONE
US 1535155	A	28-04-1925	NONE
WO 0035746	A	22-06-2000	NL 1010794 C2 19-06-2000 AU 756330 B2 09-01-2003 AU 1896800 A 03-07-2000 BG 105586 A 28-02-2002 CA 2356848 A1 22-06-2000 CN 1333725 T 30-01-2002 EE 200100311 A 15-08-2002 EP 1137571 A1 04-10-2001 JP 2002532326 T 02-10-2002 WO 0035746 A1 22-06-2000 NO 20012884 A 07-08-2001 PL 348258 A1 20-05-2002 TR 200102224 T2 21-03-2002
US 5542365	A	06-08-1996	WO 9805551 A1 12-02-1998 AU 6644996 A 25-02-1998
EP 0799764	A	08-10-1997	NL 1002756 C2 02-10-1997 DE 69708187 D1 20-12-2001 DE 69708187 T2 22-08-2002 EP 0799764 A1 08-10-1997